



Screening Instructions

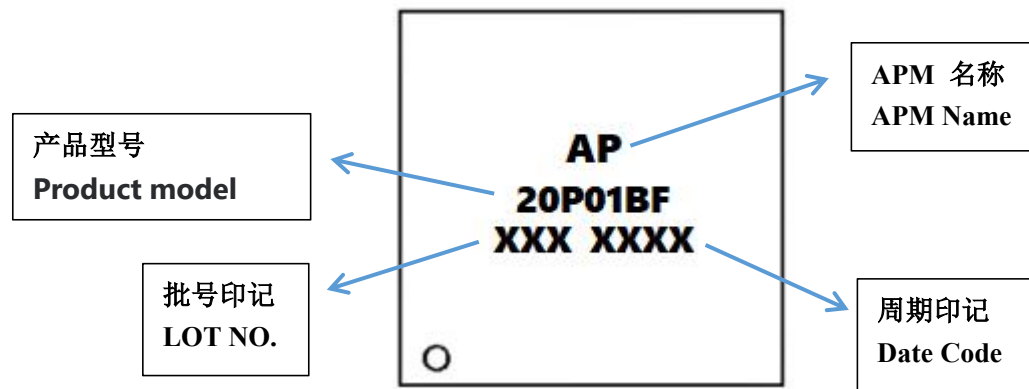


Package Mechanical Data-QFN2*2-6L --- A

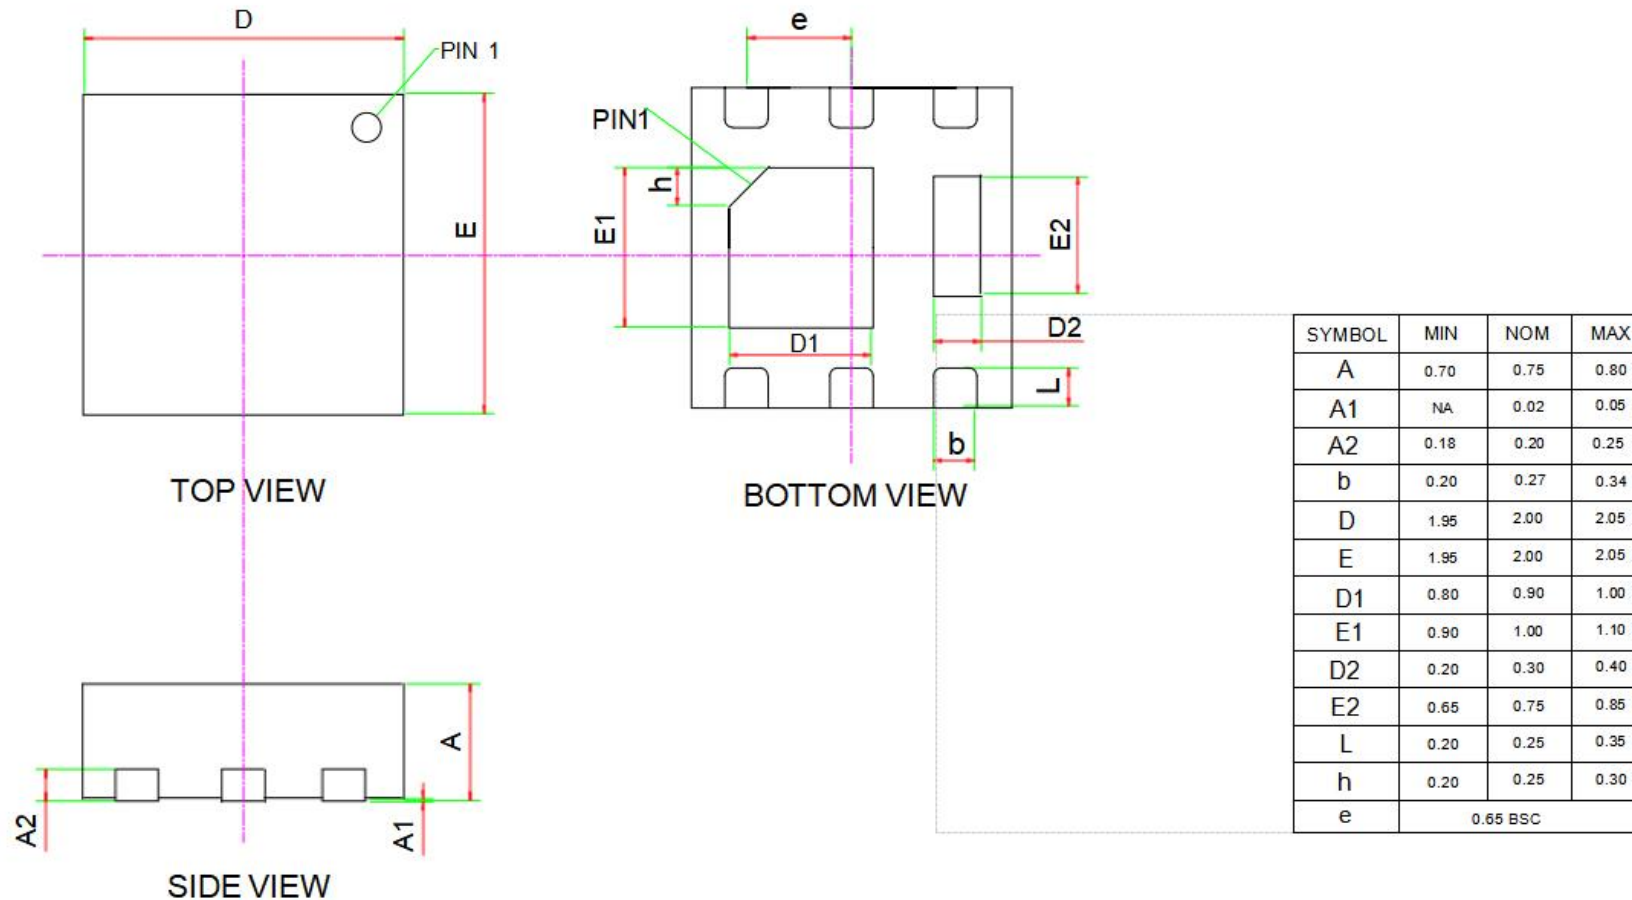


Package Mechanical Data-QFN2*2-6L --- B


symbol	Dimension in mm		
	MIN	NOM	MAX
A	0.750	0.800	0.850
A1	0.000	0.020	0.050
D	1.900	2.000	2.100
E	1.900	2.000	2.100
D1	0.800	0.900	1.000
E1	0.850	0.950	1.050
e	--	0.650	--
ax(6)	0.250	0.300	0.350
bx(6)	0.225	0.275	0.325
D2	0.200	0.300	0.400
E2	0.460	0.500	0.660
K	--	0.275	--
k1	--	0.350	--
bbb	0.100		
N	6		
MD/ME	3/2		

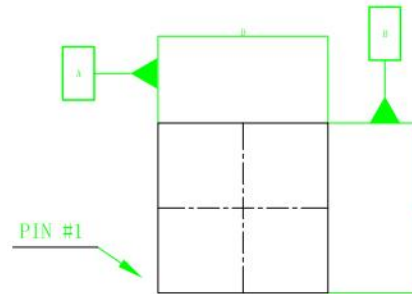

Top View





Bottom View



Side View

Reel Spectification-QFN2*2-6L

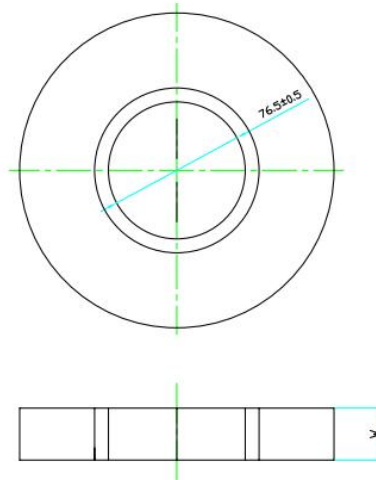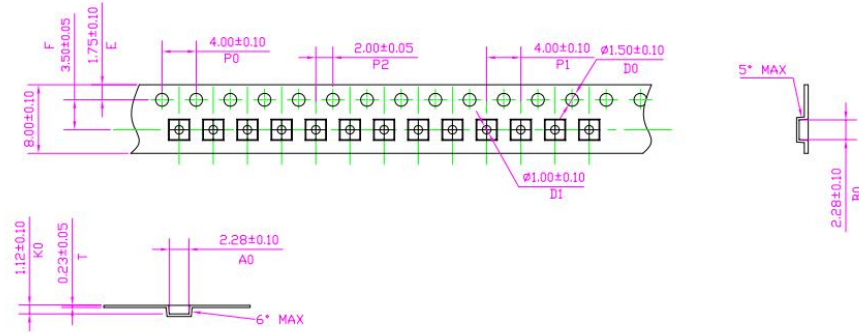

匹配载带宽度/mm	盖带宽度/mm	盖带长度 /M	盖带厚度 /um
8	$5.4 \sim 5.5 \pm 0.1$	500	54 ± 5
10	7.5 ± 0.1	300	54 ± 5
12	$9.3/9.4/9.5 \pm 0.1$	500	54 ± 5
16	$13.3 \sim 13.5 \pm 0.1$	500	54 ± 5
24	21.3 ± 0.1	300	54 ± 5
32	25.5 ± 0.1	300	54 ± 5
44	37.5 ± 0.1	300	54 ± 5
56	49.5 ± 0.1	300	54 ± 5
72	$65.5 \sim \pm 0.1$	300	54 ± 5
88	81.5 ± 0.1	300	54 ± 5

Package Quantity

封装形式 Encapsulation mode	包装方式 Modes of packing	包装数量(Package quantity)/重量 (Weight)		
		3000PCS/盘 (Reel)	6000PCS/内盒 (Inner Carton)	120000PCS/箱 (Box)
QFN2*2-6L	盘/Reel	0.1KG	1.1KG	5.06KG
			190*190*190mm	400*400*210mm