


Screening Instructions

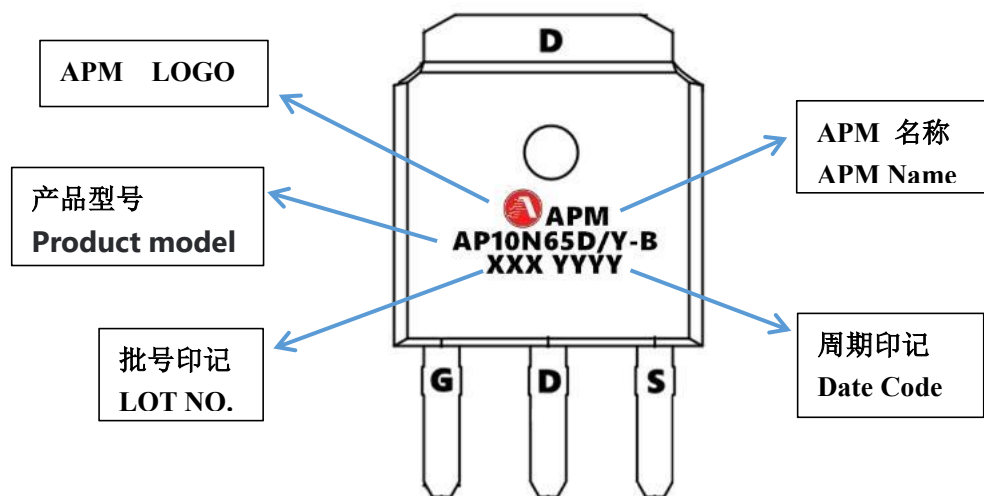

Technical drawing of the T0-251 package showing top, side, and bottom views with dimensions in millimeters (mm) and inches (in).

Top View Dimensions:

- Overall width: 6.5 mm (±0.05)
- Overall height: 2.3 mm (±0.05)
- Top edge radius: R 0.25 ~ 2X
- Lead spacing: 2.286 mm
- Lead width: 0.76 ~ 3X
- Central hole diameter: 0.076 MAX ~ 6X



Side View Dimensions:

- Overall height: 11.162 mm (±0.2)
- Lead height: 4.0 mm (±0.3)
- Lead thickness: 0.508 mm
- Lead angle: 7°
- Top edge radius: R 0.25
- Top edge thickness: 2.3 mm (±0.05)
- Top edge width: 1.01 mm (±0.05)
- Top edge angle: 17.8°

Bottom View Dimensions:

- Overall width: 5.06 mm (REF)
- Overall height: 5.25 mm (REF)
- Lead spacing: 1.2 REF (FOR CENTER)
- Lead width: 0.3 REF (FOR CENTER)

Reel Specification-TO-251

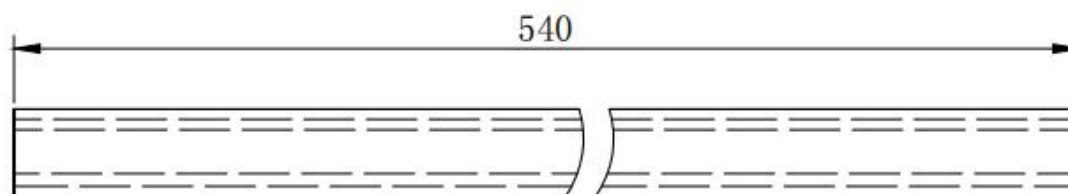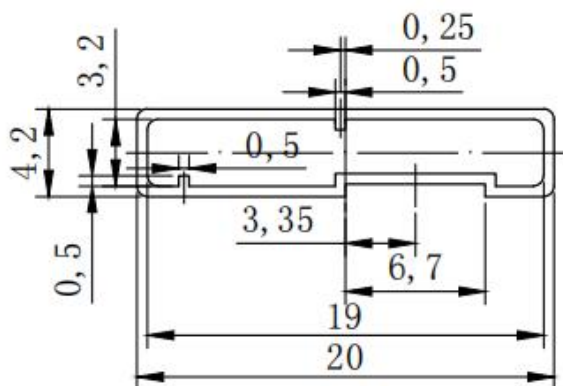

Package Quantity

封装形式 Encapsulation mode	包装方式 Modes of packing	包装数量(Package quantity)/重量 (Weight)		
		80PCS/管 Tube	4000PCS/内盒 (Inner Carton)	20000PCS/箱 (Box)
TO251-3L	管/Tube	0.046KG	2.452KG	12.83KG
			560*110*50mm	585*265*126mm