



Screening Instructions

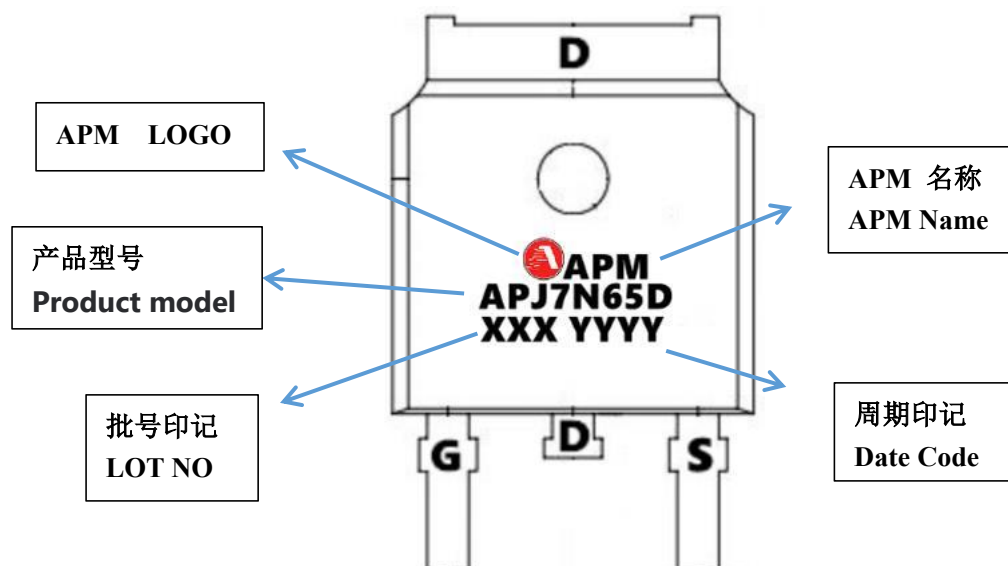

Package Mechanical Data-TO252-3L --- A

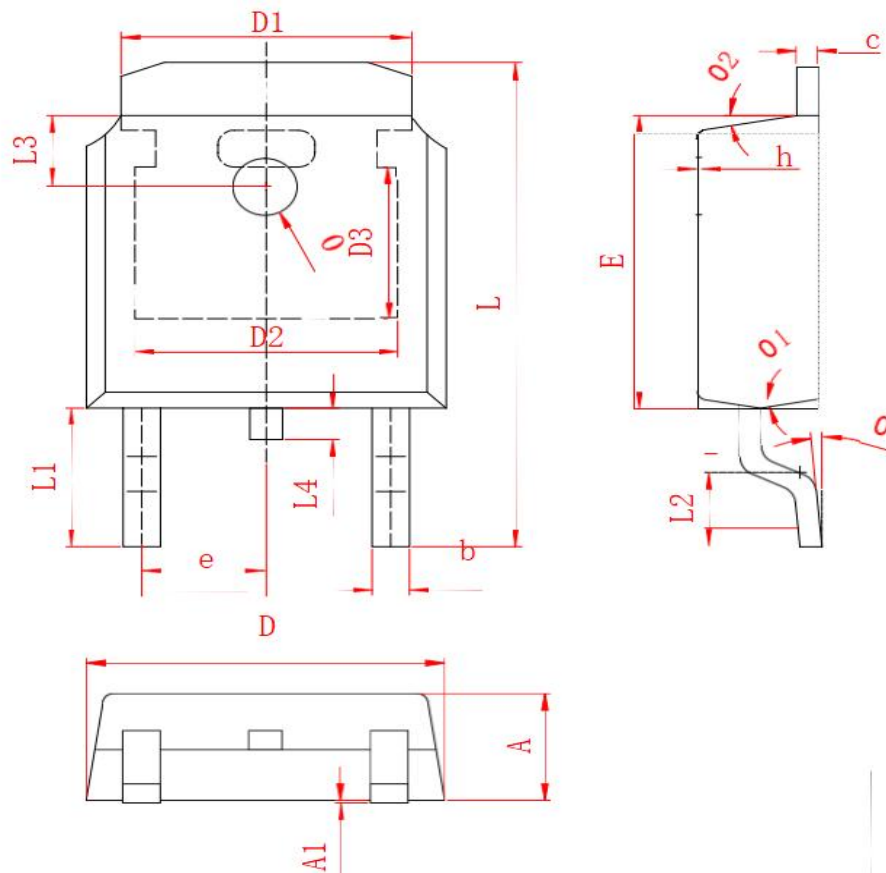

SYMBOL	MILLIMETER		SYMBOL	MILLIMETER	
	MIN	MAX		MIN	MAX
A	2.200	2.400	h	0.000	0.200
A1	0.000	0.127	L	9.900	10.30
b	0.640	0.740	L1	2.888 REF	
c	0.460	0.580	L2	1.400	1.700
D	6.400	6.700	L3	1.600 REF	
D1	5.334 REF		L4	0.600	1.000
D2	4.826 REF		?	1.100	1.300
D3	3.166 REF		9	0.	8.
E	5.800	6.200	91	9. TYP2	
e	2.286 TYP		92	9. TYP	

Technical drawing of a mechanical part, T0-252, showing top, front, and side views with dimensions in millimeters and degrees. The drawing includes a detail view 'A' showing a fillet with a 15.5° angle. Dimensions are given in green text, and specific part features are labeled in red text.

Top View Dimensions:

- Overall width: 6.5 ±0.05
- Overall height: 2.3 ±0.05
- Inner width: 5.4 ±0.2
- Inner height: 3.9 ±0.2
- Top fillet radius: R 0.25
- Top fillet angle: 7° ~ 2X

Front View Dimensions:

- Overall width: 6.1 ±0.2
- Overall height: 10.035 ±0.2
- Top width: 5.4 ±0.2
- Top height: 0.27 ±0.2
- Top fillet radius: R 0.25
- Top fillet angle: 7° ~ 2X
- Bottom width: 2.286
- Bottom height: 0.8 ±0.1
- Bottom fillet radius: R 0.076 MAX ~ 6X
- Bottom fillet angle: 7° ~ 3X


Side View Dimensions:

- Overall width: 5.06 REF
- Overall height: 5.25 REF
- Top width: 5.4 ±0.2
- Top height: 0.27 ±0.2
- Top fillet radius: R 0.25
- Top fillet angle: 7° ~ 2X
- Bottom width: 2.286
- Bottom height: 0.8 ±0.1
- Bottom fillet radius: R 0.076 MAX ~ 6X
- Bottom fillet angle: 7° ~ 3X

Detail View 'A' Dimensions:

- Overall width: 5.06 REF
- Overall height: 5.25 REF
- Top width: 5.4 ±0.2
- Top height: 0.27 ±0.2
- Top fillet radius: R 0.25
- Top fillet angle: 7° ~ 2X
- Bottom width: 2.286
- Bottom height: 0.8 ±0.1
- Bottom fillet radius: R 0.076 MAX ~ 6X
- Bottom fillet angle: 7° ~ 3X

Reel Specification-TO-252

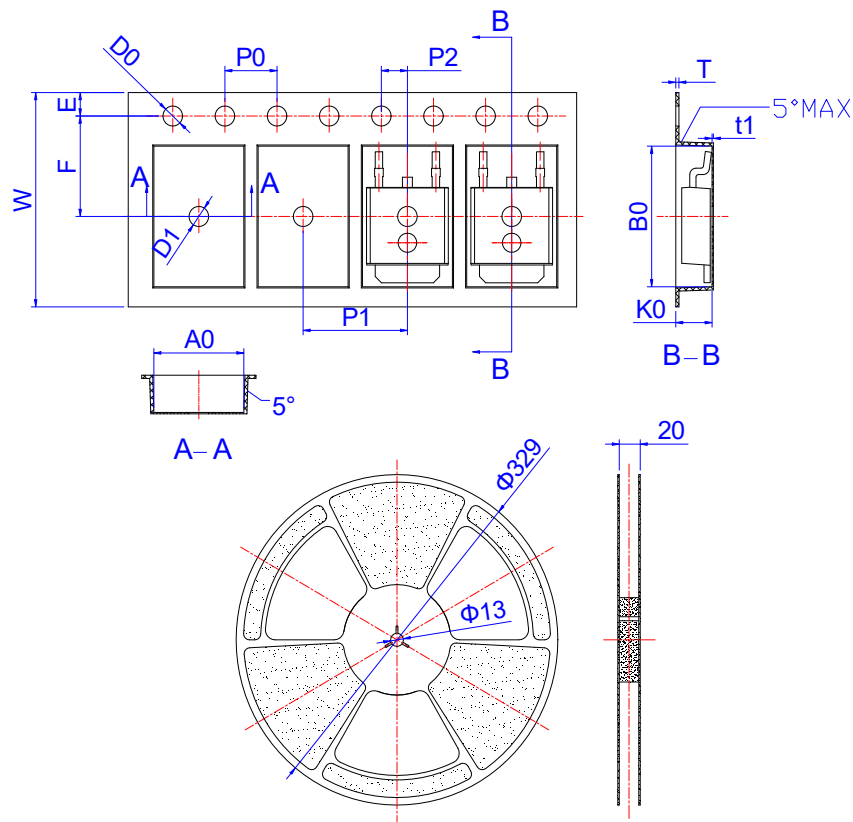

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	15.90	16.00	16.10	0.626	0.630	0.634
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
D0	1.40	1.50	1.60	0.055	0.059	0.063
D1	1.40	1.50	1.60	0.055	0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
A0	6.85	6.90	7.00	0.270	0.271	0.276
B0	10.45	10.50	10.60	0.411	0.413	0.417
K0	2.68	2.78	2.88	0.105	0.109	0.113
T	0.24		0.27	0.009		0.011
t1	0.10			0.004		
10P0	39.80	40.00	40.20	1.567	1.575	1.583

Package Quantity

封装形式 Encapsulation mode	包装方式 Modes of packing	包装数量(Package quantity)/重量 (Weight) 外箱尺寸: 380*275*370mm		
		2500PCS/盘 (Reel)	5000PCS/内盒 (Inner Carton)	25000PCS/箱 (Box)
T0252-3L	盘/Reel	1.153KG	2.534KG	13.364KG
			362*350*50mm	380*275*370mm