




Screening Instructions

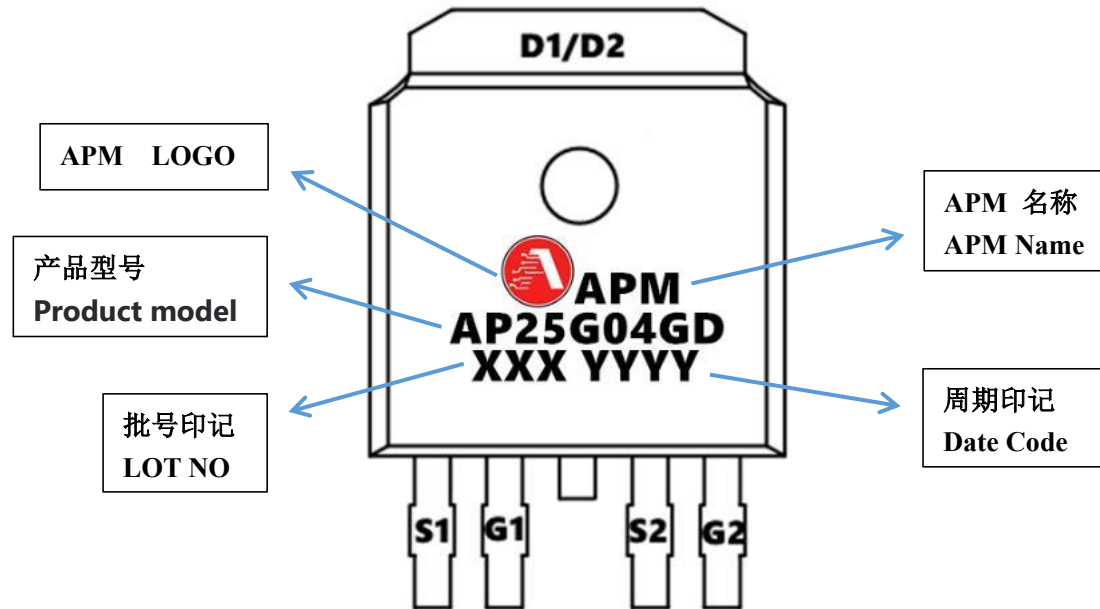

Package Mechanical Data-TO252-4L --- A


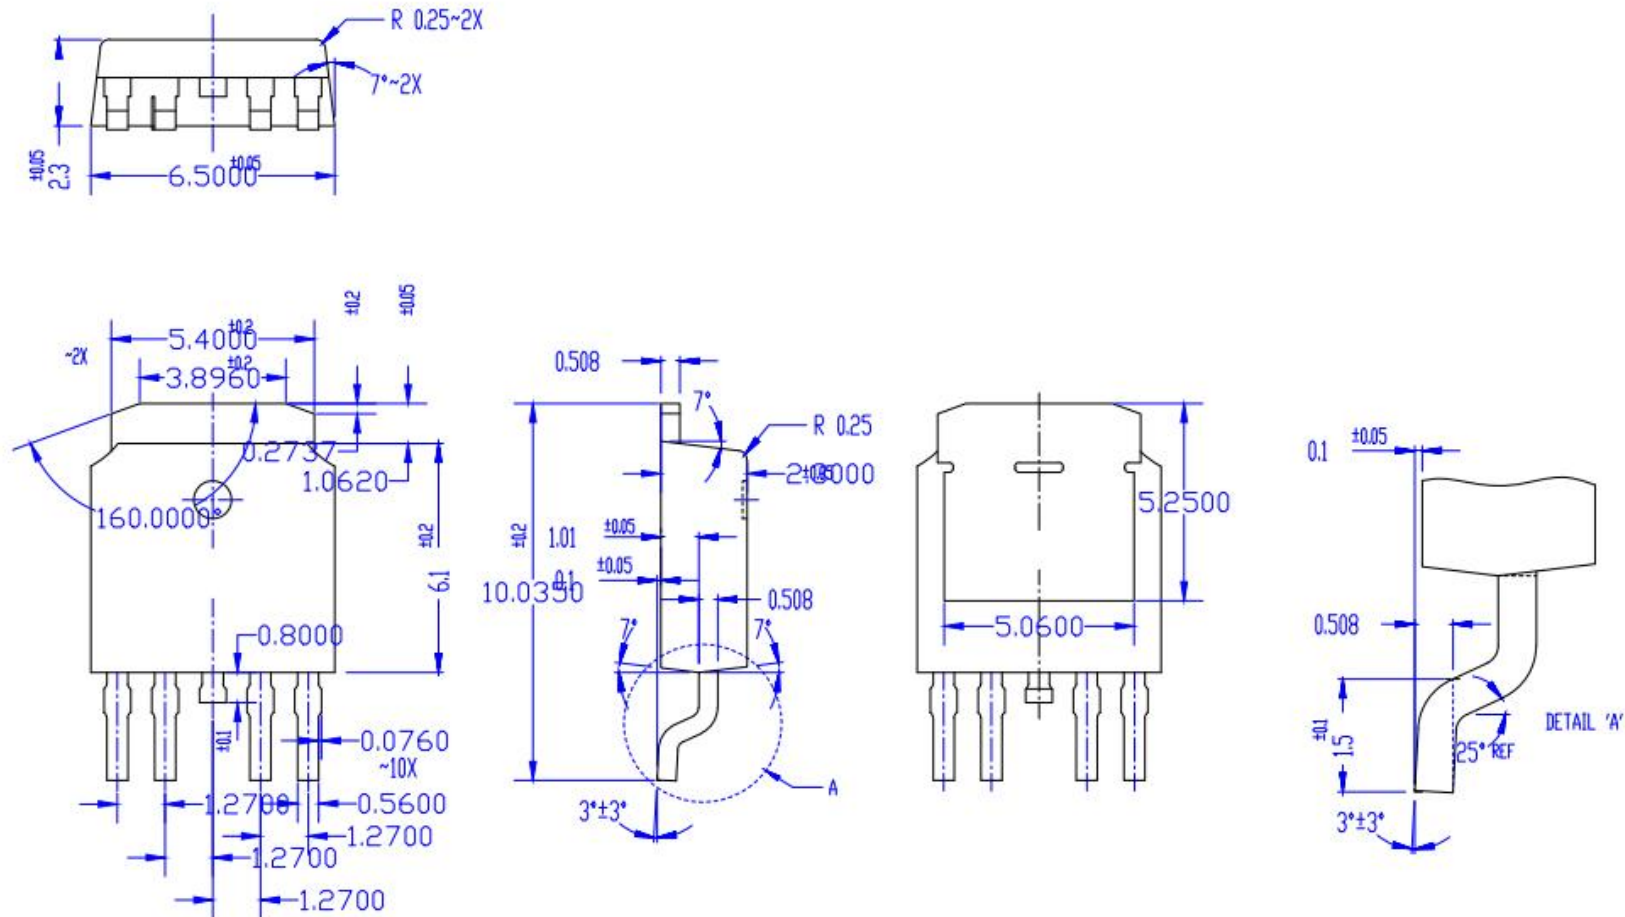


Package Mechanical Data-TO252-4L --- B

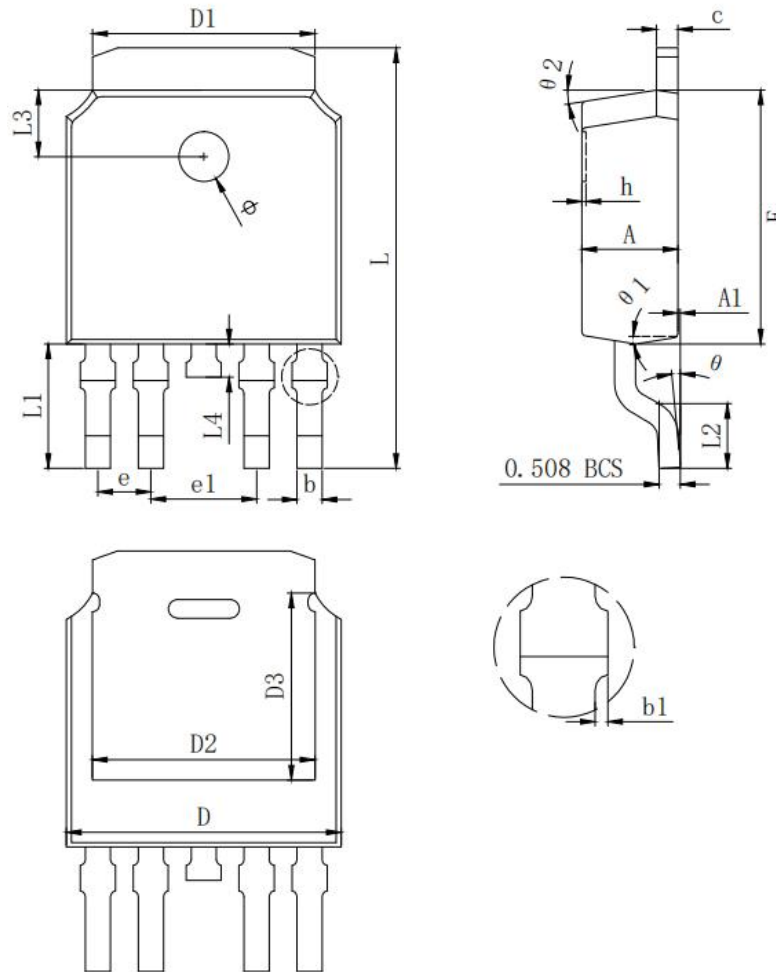

SYMBOL	MILLIMETER		
	MIN	Typ.	MAX
A	2.200	2.300	2.400
A1	0.000		0.127
b	0.550	0.600	0.650
b1	0.000		0.120
e (电镀后)	0.460	0.520	0.580
D	6.500	6.600	6.700
D1		5.334 REF	
D2		5.346 REF	
D3		4.490 REF	
E	6.000	6.100	6.200
e		1.270 TYP	
e1		2.540 TYP	
h	0.000	0.100	0.200
L	9.900	10.100	10.300
L1		2.988 REF	
L2	1.400	1.550	1.700
L3		1.600 REF	
L4	0.700	0.800	0.900
ϕ	1.100	1.200	1.300
θ	0°		8°
$\theta 1$		9° TYP	
$\theta 2$		9° TYP	

Reel Specification-TO252-4L

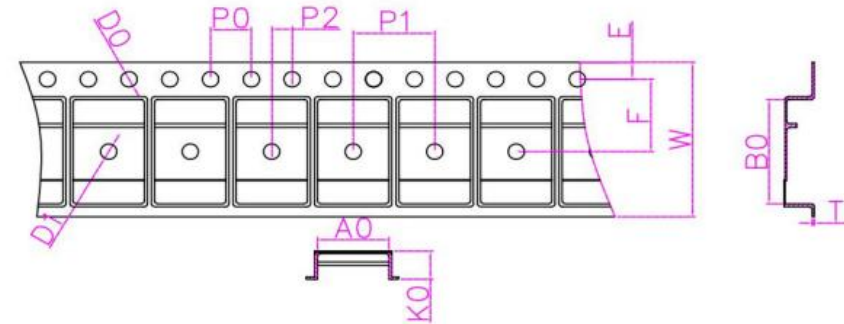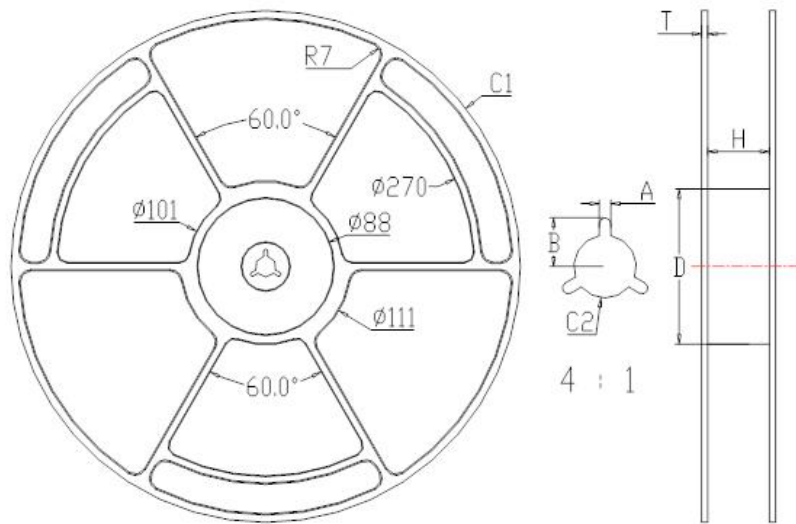

W	16.00±0.10	T	0.22±0.02	D1	1.60±0.10
E	1.75±0.10	F	7.50±0.10	D0	1.60±0.10
P0	4.00±0.10	P1	8.00±0.10	P2	2.00±0.10
A0	6.90±0.10	B0	10.50±0.10	K0	2.70±0.10

Package Quantity

封装形式 Encapsulation mode	包装方式 Modes of packing	包装数量(Package quantity)/重量 (Weight)		
		2500PCS/ 盘(Reel)	5000PCS/内盒 (Inner Carton)	25000PCS/箱 (Box)
TO252-4L	盘/Reel	1.156KG	2.581KG	13.682KG
			362*350*50mm	380*275*370mm