




Screening Instructions

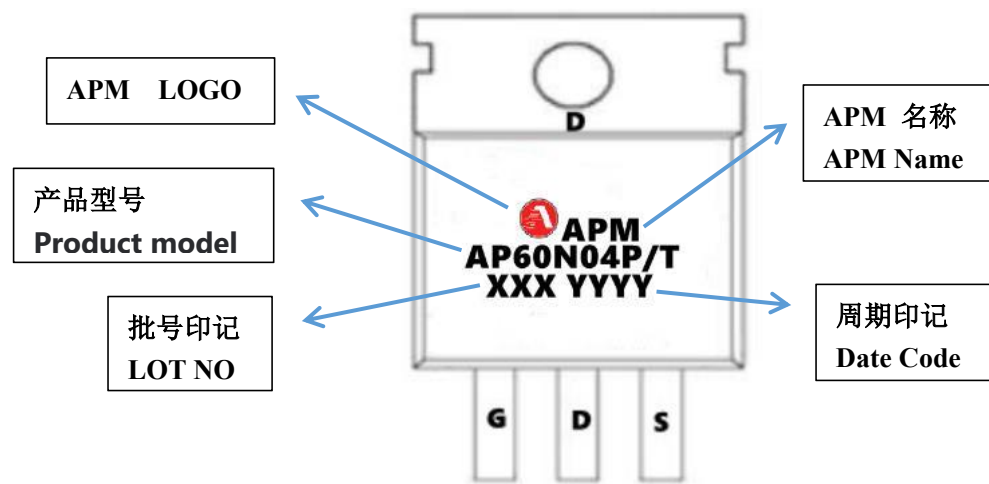

Package Mechanical Data-TO263-3L --- A

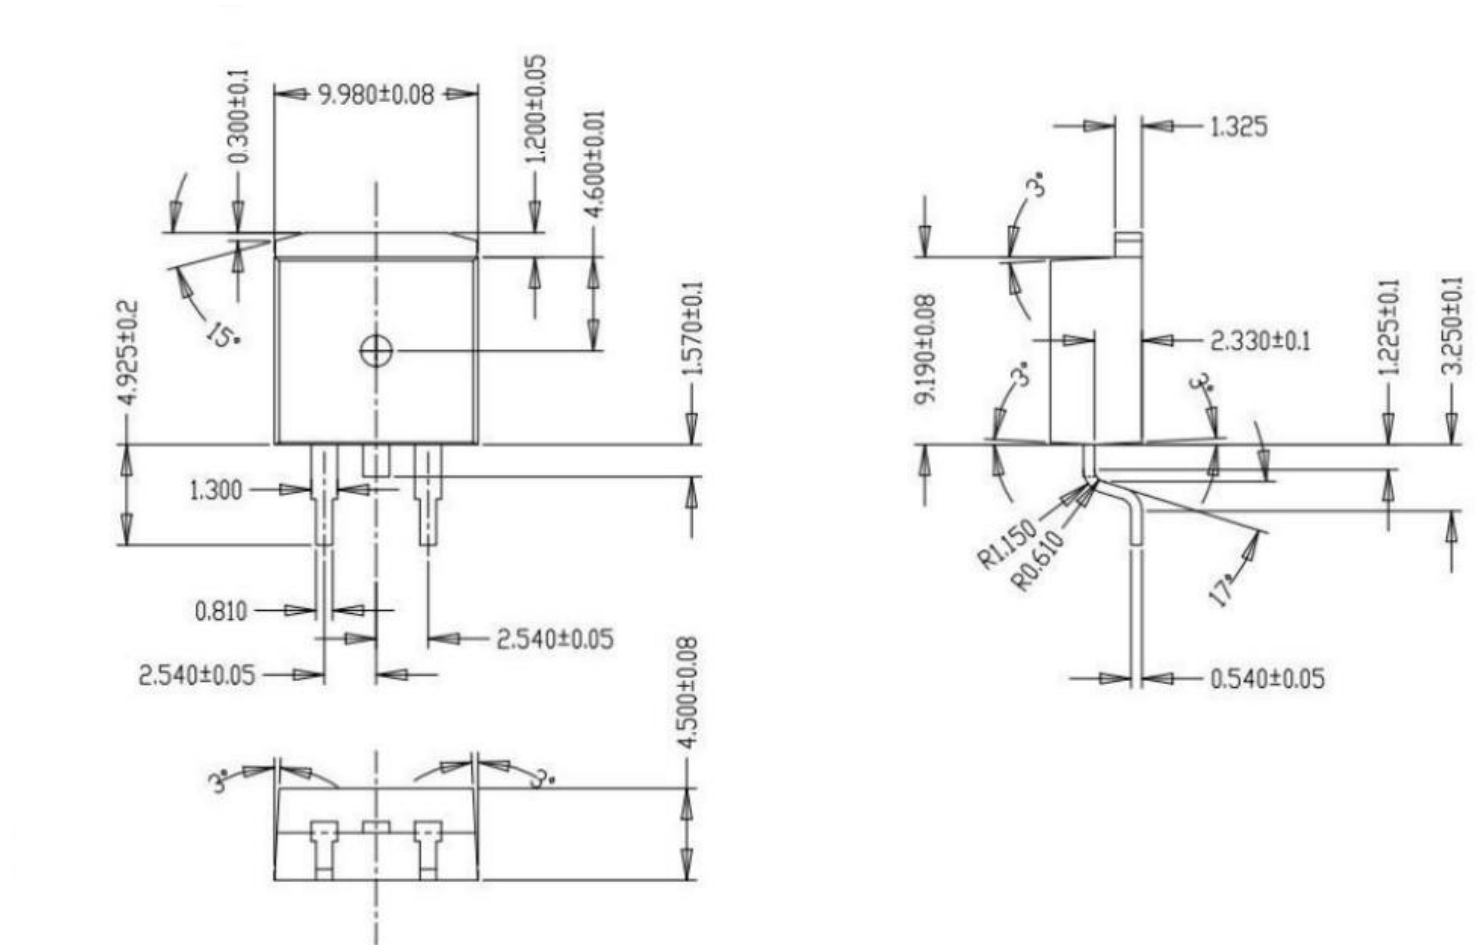


Package Mechanical Data-TO263-3L --- B

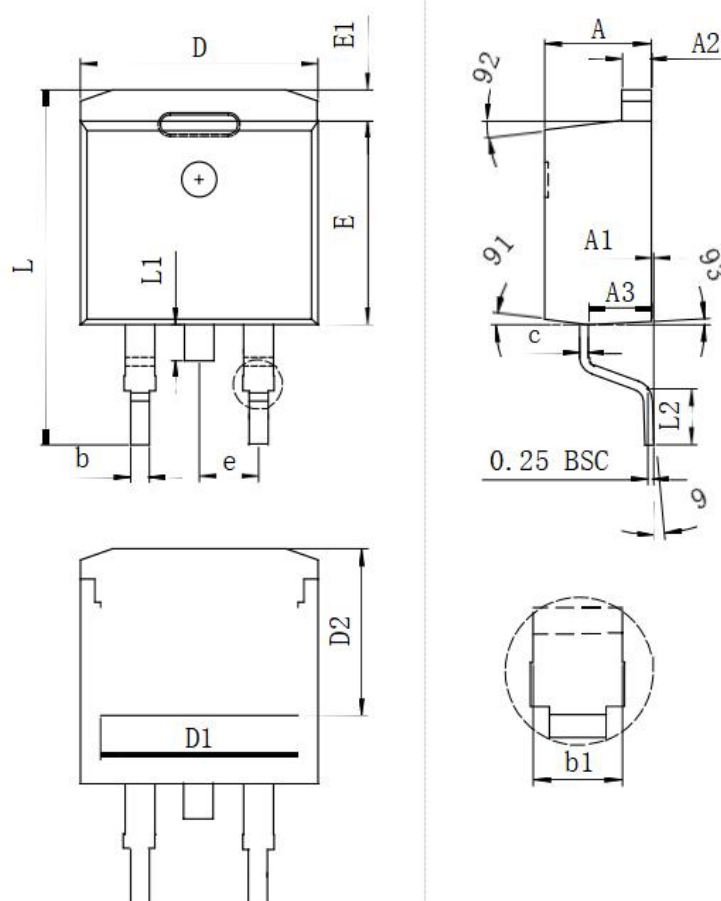


SYMBOL	MILLIMETER		
	MIN	Typ.	MAX
A	4.370	4.570	4.770
A1	0.000		0.250
A2	1.220	1.270	1.420
A3	2.490	2.690	2.890
b	0.700	0.810	0.960
b1	1.170	1.270	1.470
c	0.300	0.380	0.530
D	9.860	10.160	10.360
D1	8.400 REF		
D2	7.073 REF		
E	8.500	8.700	8.900
E1	1.070	1.270	1.470
e	2.540 TYP		
L	14.700	15.100	15.500
L1	1.400	1.550	1.700
L2	2.000	2.300	2.600
9	0°		9°
91	7° TYP		
92	7° TYP		
93	3° TYP		

Reel Spectification-TO-263-3L

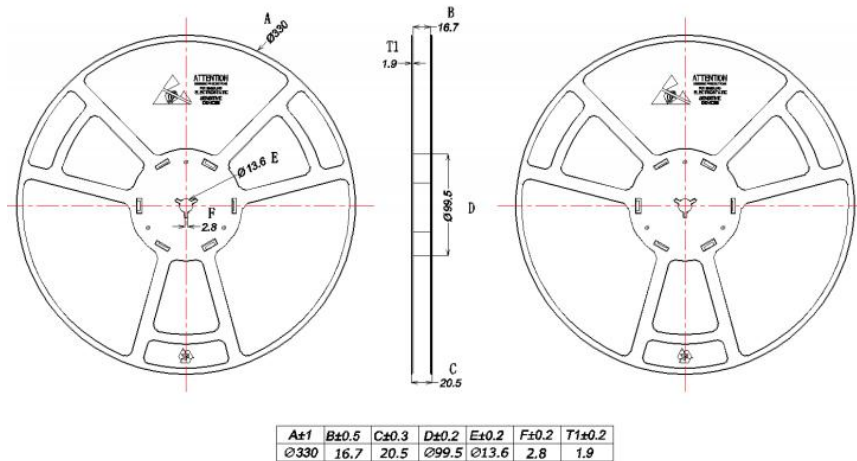

Symbol	A0	B0	K0	D0	D1	P0	P1	10*P0	
Spec	10.00±0.10	16.10±0.1	5.20±0.10	1.55±0.10	1.55±0.10	4.00±0.10	16.00±0.10	40.00±0.10	
Symbol	W	E	F	P2	t	t1			
Spec	24.00±0.10	1.75±0.10	11.50±0.10	2.00±0.10	0.35±0.02	0.05以上			



NOTE:
1.材料: SPCS
2.10个链孔的累积公差不能超过0.2MM;
3.250MM带子的扇形不得超过1MM;
4.按照EIA-481-D的要求。

Package Quantity

封装形式 Encapsulation mode	包装方式 Modes of packing	包装数量(Package quantity)/重量 (Weight)		
		800PCS/盘 (Reel)	800PCS/内盒 (Inner Carton)	4000PCS/箱(Box)
TO263-3L	盘/Reel	1.561KG	1.824KG	9.894KG
			362*350*50mm	380*275*370mm